

DOUBLELIN

Bridge Type Cap Embroidery Machine

DLCA 桥式帽绣机



DLCA model is a all-round champion. One machine can booth doing flat embroidery, cap embroidery, tubular embroidery and cylindrical embroidery.

DLCA机型是一位全能冠军，一台机器可以平绣，桶状绣，成衣绣，帽绣，样样都能，样样都精通。



Doublelin only twin cam twin driver with solenoid drive jumping technology, not expensive but excellent. Machine use pin type take-up lever driver, the height of presser foot can be adjustable based on the thickness of fabric.

双林独有的带跳跃电磁铁的双凸轮双驱动设计，在采用最新技术提高机器品质的同时又不华而不实。自锁拨叉式挑线杆驱动方式，压脚高度可以根据所绣布料的厚度自由调节。



5.7" TFT color display control system with build-in USB port. Model A with Wi-Fi connecting and networking, max memory 2 million stitches, supporting Chinese, English, Turkish, Spanish and Portuguese language. Model B with networking, max memory 100 million stitches, supporting Chinese and English language.

5.7英寸真彩显示，带内置式USB接口。A型带无线连接和网络功能，最高内存200万针，支持中文，英文，土耳其文，西班牙文和葡萄牙文。B型带网络功能，最好内存1亿针，支持中文和英文。

Max speed up to 1000rpm. 6/9/12/15 colors. With auto trimming system and separate motor drive upper thread hook system each head.


最高转数可达每分钟1000转。可选择6，9，12，15色。自动剪线和每个机头独立式电机驱动钩线装置。

Special design super strong machine body, makes less shark even at high speed. 特殊设计规格的高强度机架，保持机器在高速运转状态下的稳定。

New tension base set with FTC and UTC in one unit, keeps each needle thread tension same and stable. The take-up spring moved to the middle thread area to let machine make wonderful embroidery jobs.

新型底线面线断线报警一体式夹线座，让每根针的线张力都保持稳定和一致。外加挑线簧中置式设计，极大地提高了绣花质量。

4 heads or more using middle rail on X-axis frame moving system and stronger type upper bridge base, machine runs better. 4头及以上机型采用X向驱动中导轨和加固型上梁等高箱设计，运转更稳定。

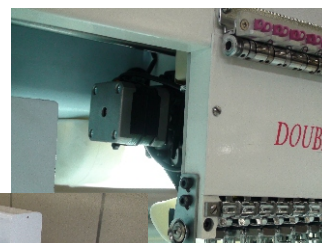

Factory option/工厂选配装置:
Face thread holder/面线夹持功能
High speed all motor drive sequin device/高速全电机驱动亮片绣装置

DOUBLELIN

Option/选配装置:
High speed cording device/高速绳绣装置
Boring device/雕孔绣装置

Standard Accessories/机器标准附件:
Broader frame/平绣绣框Clips/布夹Bobbin thread winder/底线绕线机Stand table for flat embroidery/平绣用标准尺寸台板A set of standby parts
一套备用零件A set of tools/一套工具Manual and parts book/操作说明书和零件目录Wooden case packing/木箱包装

Option Accessories/另选附件:
Garment Hoop Holder/成衣框支架
Garment Hoop/成衣框: 90, 120, 150, 190, 290*290
Cap Hoop Driver 270 degree/270度帽框驱动
Cap Hoop 270 degree/270度帽框
Cap Hoop Station/帽座

Model 型号	Needle 针数	Head 头数	Embroidery space per head (X*Y) mm 每头绣花面积	Head to Head distance 头距	Weight 重量	A	B	C	D
DLCA-1201 400(400)*450	12	1	400*450		660kg	1550	1400	1700	710
DLCA-1501 500(500)*450	15	1	500*450		700kg	1750	1400	1700	710
DLCA-0902 400(400)*450	9	2	400*450	400	735kg	1950	1400	1700	710
DLCA-1202 500(500)*450	12	2	500*450	500	790kg	2250	1400	1700	710
DLCA-0904 400(400)*450	9	4	400*450	400	1230kg	2950	1400	1700	1000
DLCA-1204 500(500)*450	12	4	500*450	500	1370kg	3450	1400	1700	1000
DLCA-0906 400(400)*450	9	6	400*450	400	1600kg	3750	1400	1700	1000
DLCA-1206 500(500)*450	12	6	500*450	500	1800kg	4450	1400	1700	1000
DLCA-0908 400(400)*450	9	8	400*450	400	1850kg	4550	1400	1700	1000
DLCA-1208 500(500)*450	12	8	500*450	500	2220kg	5450	1400	1700	1000

More machine sizes are also available, please contact Doublelin or its distributors./我们还有更多的机器规格, 详情请联络双林或其代理。


Stitch length/针步长度 0.1~12.7mm

Speed/速度 Max 1000rpm/最高每分钟1000转

Motor/电机 12 heads or less: Induction motor x1, Pulse motor x2; more than 12 heads: AC servo motor x1, Pulse motor x2/12头或以下: 主轴: 变频, XY电机: 三相细分; 12头以上: 主轴: 伺服, XY电机: 三相细分

Electricity/电压 Single-phase: 95~125V, 170~265V or 3-phase: 220V, 380~420V/单相: 95~125伏, 170~265伏或三相: 220伏, 380~420伏

Power consumption/功率 1.1~2.2kW/1.1~2.2千瓦

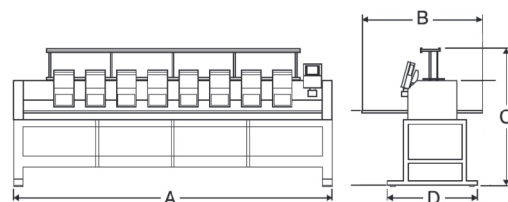

Doublelin Electronic Machinery Co., Ltd.
1218 Huiping Road, Jiading Dist.
Shanghai 201802, China
Tel: +86-21-6284-1488 Fax: +86-21-6917-2070
Email: doublelin@doublelin.net
Shanghai Zunlin Industries & Trading Co., Ltd.
Martwin International Inc.
Doublelin America LLC

上海双林电子机械有限公司
上海市嘉定区惠平路1218号
电话: 021-6284-1488 传真: 021-6917-2070
电子邮件: doublelin@doublelin.net
www.doublelin.net
上海尊林工贸有限公司
玛林国际有限公司
双林美洲有限责任公司

*We reserve the right to change the specification for improvements without previous notice.
*我们保留在未事先通知的情况下改进机器的功能和参数。